


TYPICAL SECTION

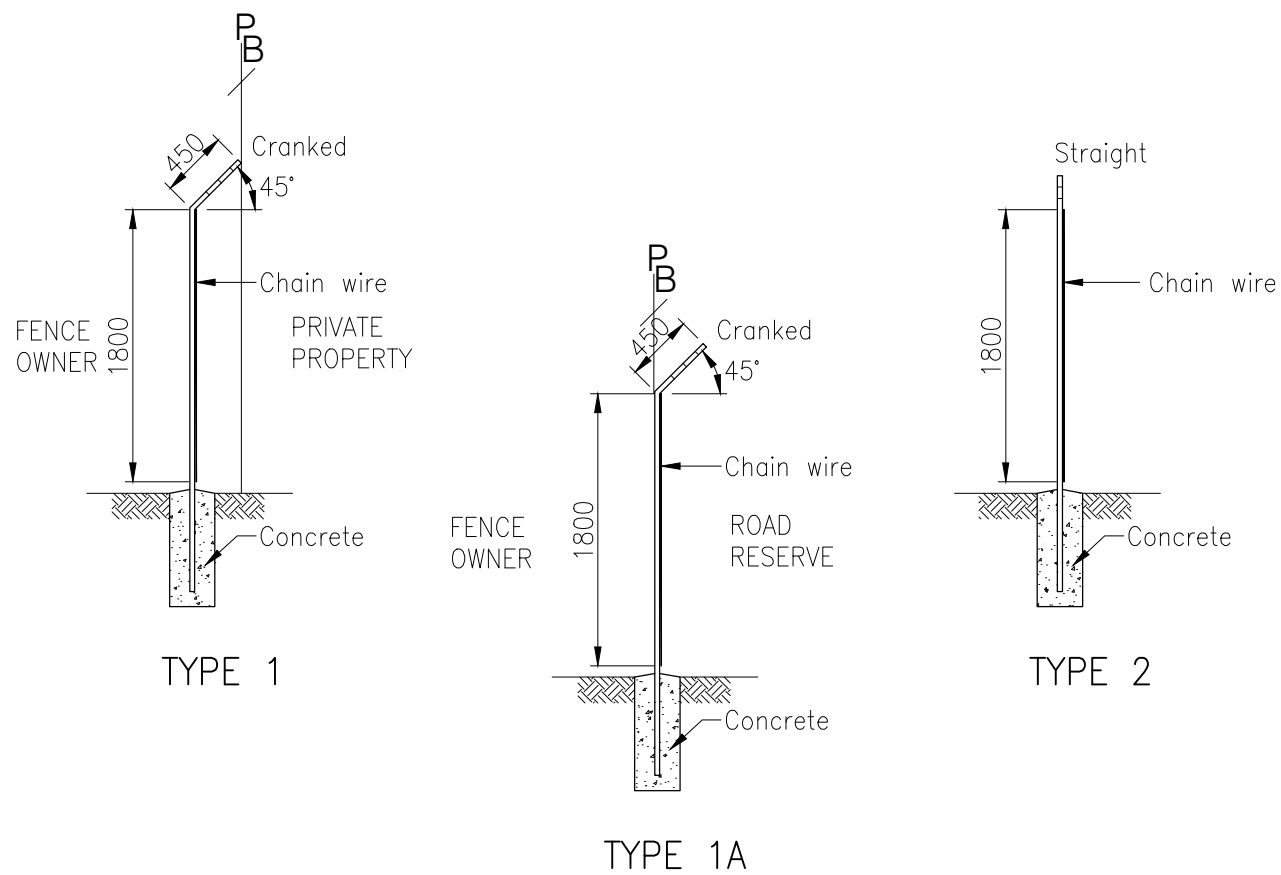

LEGEND

PROPERTY BOUNDARY

\* Over hang allowed to be over road reserve but not over private property

NOTES:

- POSTS: Gate posts to be DN 80 (light) galvanised steel tube, to AS 1074. Corner, end and every eighth post to be DN 80 (light) galvanised steel tube to AS 1074. Intermediate posts and goose necked stays to be DN 50 (light) galvanised steel tube to AS 1074. Galvanised steel end caps to be provided to all posts. All Posts to be Vertical.
- Corner posts to be adopted where the change in angle in horizontal alignment exceeds 20 degrees.
- Stays to be provided at end posts, gate posts, corner posts and every eighth post.
- Standard couplings (down-ee fittings) may be used as an alternative to welds. For all connections except goose necked stays which shall be welded to posts.
- All welds to be 5 thick continuous fillet welds to AS 1554 with cold galvanising treatment to completed welds.
- Cables to be formed from two 3.15mm diameter wires twisted together and installed in accordance with AS 1725.
- All posts, stays and cables are to be galvanised in accordance with AS 1650.
- All concrete N25 in accordance with AS 1379 and AS 3600.
- Chain wire to be fixed using 1.6 wire ties as follows:  
Intermediate posts at 3 locations  
End posts at 3 locations  
Horizontal cable at 375 centres to top cable  
Horizontal cable at 600 centres to middle cable  
Horizontal cable at 450 centres to bottom cable
- Barbed wire to AS 2423.
- All dimensions in millimetres.

APPLICABILITY TABLE							
Council	BSC	CHRC	GRC	IRC	LSC	MRC	RRC
Applicable	Yes	Yes	Yes	Yes	Yes	Yes	Yes

REVISIONS	DATE
E IRC ADDED	12/2016
D GRC AND LSC ADDED	09/2014
C MRC ADDED	04/2011
B NOTE ADDED RE CRANKED OVERHANG	07/2010
A POST AMALGAMATION REVIEW	01/2010

**DISCLAIMER.**  
The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, of consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.

**Capricorn Municipal Development Guidelines**

Incorporating:  
Banana Shire Council (BSC) Livingstone Shire Council (LSC)  
Central Highlands Regional Council (CHRC) Maranoa Regional Council (MRC)  
Gladstone Regional Council (GRC) Rockhampton Regional Council (RRC)  
Isaac Regional Council (IRC)

CHAIN WIRE SECURITY FENCE

GENERAL	
STANDARD DRAWING	
CMDG-G-011	
REV.	A B C D E